

Sliding door with automatic **SOFT-CLOSE®** system

Ideal for public areas and access for mobility-impaired persons

demo
video



4 kits ready to fit for the following widths of openings:
700, 800, 900 and 1000 mm

Perfect finish with anodized aluminium strip
(with returns)

Hydraulic retarder for soft and silent closing

Closing speed can be adjusted



***For doors 40 mm thick
and weighing no more
than 60 kg***



MANTION
HERCULE® - SPORTUB® - MINISPORT®



HOW TO CHOOSE YOUR KIT:

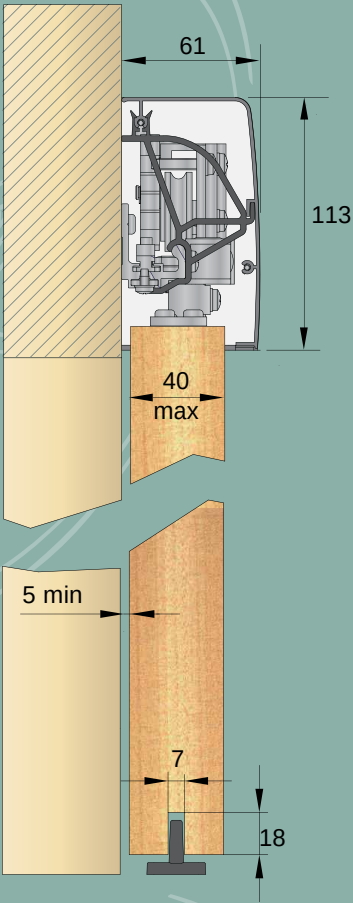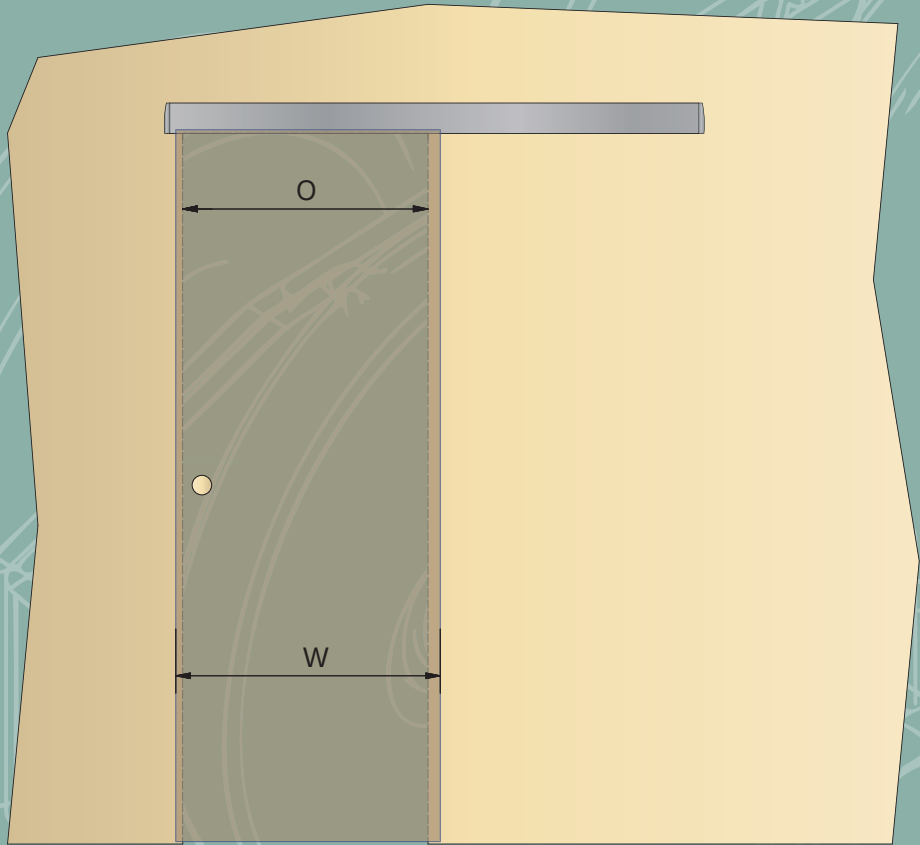

IF YOU ARE CREATING A NEW DOOR OPENING:
the width of the new opening should be based on standard door widths

W (door width)	KIT reference number	O (width of the opening)
730	SC-70	650
830	SC-80	750
930	SC-90	850
1030	SC-100	950
1480	SC-145	1400

RENOVATION, EXISTING DOOR FRAME:
base your choice on the width of the existing opening to determine the width of the door you need

O (width of the opening)	KIT reference number	W (door width)
700	SC-70	780
800	SC-80	880
900	SC-90	980
1000	SC-100	1080
1450	SC-145	1530

KITS ready to fit

Composition of a kit

- 1 track in anodized aluminium
- 1 rack
- 1 box of SOFT-CLOSE components
- 1 strip with two ends and two strip supports
- 2 fitments with fitted plates
- 2 fixed stops
- 1 adjustable "open door" stop
- 1 floor guide

Ref. number

Description

SC-70

For doors 730 to 780 mm wide

SC-80

For doors 830 to 880 mm wide

SC-90

For doors 930 to 980 mm wide

SC-100

For doors 1030 to 1080 mm wide


SC-145

For doors 1480 to 1530 mm wide

OPTION CLOSING

3012CSC

Additional rack allowing closing time adjustment
(for SC-145 kit : you have to use 2 racks)

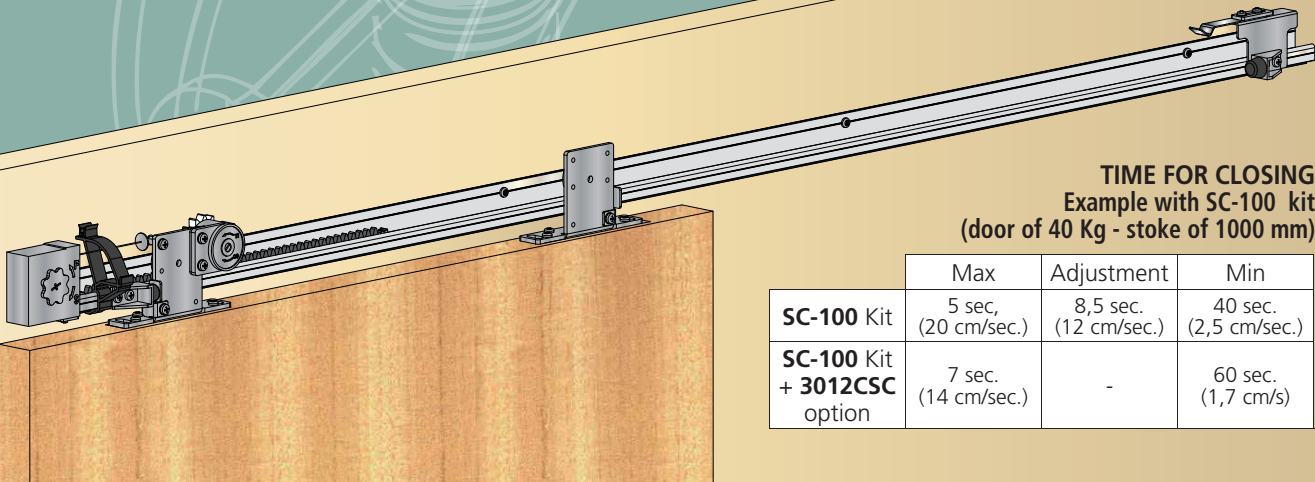

TIME FOR CLOSING
Example with SC-100 kit
(door of 40 Kg - stoke of 1000 mm)

	Max	Adjustment	Min
SC-100 Kit	5 sec. (20 cm/sec.)	8,5 sec. (12 cm/sec.)	40 sec. (2,5 cm/sec.)
SC-100 Kit + 3012CSC option	7 sec. (14 cm/sec.)	-	60 sec. (1,7 cm/s)